

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 974 892 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

26.01.2000 Bulletin 2000/04

(51) Int. Cl.⁷: G06F 3/12

(21) Application number: 99305793.4

(22) Date of filing: 21.07.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 22.07.1998 JP 20614498

(71) Applicant:

SEIKO EPSON CORPORATION
Shinjuku-ku, Tokyo 163-0811 (JP)

(72) Inventor: Shima, Toshihiro

Suwa-shi, Nagano 392-8502 (JP)

(74) Representative:


Sturt, Clifford Mark et al
Miller Sturt Kenyon
9 John Street
London WC1N 2ES (GB)

(54) Printing system, printer and print server

(57) When a print job occurs, each host computer stores its job data on its own disk and sends job location data showing the location of the job data to a print server. The print server temporarily stores the job location data and sends it to a printer when the printer is

ready. When the printer receives the job location data, it fetches job data from the host computer which the job location data shows and prints the job data.

FIG. 2

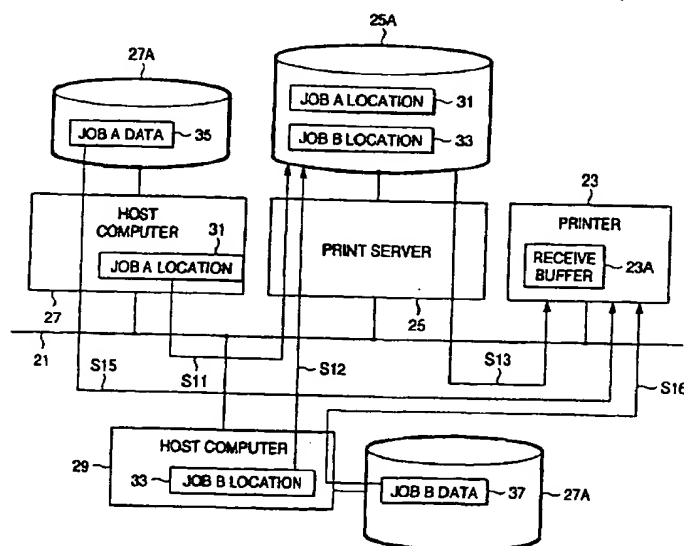

EP 0 974 892 A2

Description

[0001] The present invention relates to a printer and a printing system for receiving a print job from a host computer and printing it.

[0002] The present application is based on Japanese Patent Application No. Hei. 10-206144, which is incorporated herein by reference.

[0003] As for a conventional type printer, a host computer or a print server unilaterally sends a print job to a printer and the printer passively receives and processes it. Fig. 1 shows an example of connection in case a conventional type printer is used in network environment such as LAN. A printer 3, a print server 5 and host computers 7 and 9 are connected on a network 1. The host computers 7 and 9 send respective print job data 11, 13 to the print server 5 in steps S1 and S2. The print server 5 sequentially sends the job data 11, 13 to the printer 3 in S3 after the print server stores the job data in an auxiliary storage 5A such as a disk and queues it. The printer 3 processes the job data after it passively stores the job data from the print server 5 in a receive buffer memory 3A.

[0004] The print server 5 requires an auxiliary storage of very large capacity for storing job data. As the print server 5 is required in network environment, it costs. A printer also requires a receive buffer memory of large capacity for receiving job data. A printer always only prints under the initiative of a host computer and a print server and cannot spontaneously print (for example, cannot execute a print job set by a printer at time set by the printer).

[0005] Therefore, the object of the present invention is to enable a print server to dispense with an auxiliary storage of large capacity.

[0006] Another object of the present invention is to reduce the cost required for the installation of a print server.

[0007] Further another object of the present invention is to enable a printer to dispense with a receive buffer memory of large capacity.

[0008] The other object of the present invention is to enable a printer to spontaneously print.

[0009] In a printing system according to the present invention, when a print job occurs, a host computer does not generate its job data immediately and does not send it to a printer or a print server unilaterally but stores the job data in a storage inside the host computer or leaves the generation of job data until later. When the printer executes the print job, it demands its job data from the host computer. The host computer sends the stored job data to the printer or generates job data at that time and sends it to the printer in response to a job request.

[0010] In preferred embodiments, a host computer informs a print server of the location of job data and the print server temporarily stores the informed job location and sends it to a printer at suitable time. When the

printer executes the job, it requests the host computer which the job location shows to send the job data.

[0011] When a printer demands job data from a host computer, it may also demand the whole job data, however, a printer may also demand only a part to be processed of job data.

[0012] A computer can typically function as a print server and a host; however, a computer program to realize the above can be installed in a computer or loaded into a computer via various media such as a disk storage, a semiconductor memory and a communication network.

[0013] Features and advantages of the invention will be evident from the following detailed description of the preferred embodiments described in conjunction with the attached drawings.

[0014] Embodiments of the present invention will now be described by way of further example only and with reference to the accompanying drawings, in which:-

Fig. 1 is a block diagram showing an example of connection in case a conventional type printer is used in network environment;

Fig. 2 is a block diagram showing connection in an embodiment of the present invention;

Fig. 3 is a flowchart showing the operation of the printer driver of host computers 27 and 29;

Fig. 4 is a flowchart showing the operation of the printer driver of the host computers 27 and 29;

Fig. 5 is a flowchart showing the operation of a server;

Fig. 6 is a flowchart showing the operation of the server;

Fig. 7 is a flowchart showing the operation of a printer;

Fig. 8 is a block diagram showing a transformed example of the above embodiment;

Fig. 9 is a block diagram showing another transformed example; and

Fig. 10 is a block diagram showing a second embodiment.

[0015] Fig. 2 shows the whole configuration and the outline of operation in an embodiment of the present invention.

[0016] A printer 23, a print server 25, host computers 27 and 29 are connected to a communication network 11 such as a local area network (LAN). When a printer driver in each host computer 27, 29 receives an instruction to print from a user, it generates print job data 35, 37, stores each job data 35, 37 in an auxiliary storage 27A, 29A which each host computer has such as a fixed disk and sends data 31, 33 showing the location of each job data 35, 37 such as the address in the network 11 of each host computer 27, 29, the local directory in the host computer 27, 29 of each job data 35, 37 and a set of the local directory and an identifier to the print server 25 in steps S11 and S12.

[0017] The print server 25 receives job location data 31, 33 from the host computers 27 and 29, temporarily stores the data in an auxiliary storage 25A such as a fixed disk, queues it and sequentially sends the job location data 31, 33 to the printer 23 in S13. The printer 23 stores the job location data 31, 33 sent from the print server 25 and sends a job request to the host computer 27 or 29 which stores its job data 33 or 35 using the job location data 31 or 33 of its print job. When the printer executes each print job. The host computer 27 or 29 which receives the job request reads job data 33 or 35 which the job location data 31 or 33 shows from its own auxiliary storage 27A or 29A and sends the job data to the printer 23 in S15 or S16. The printer 23 temporarily stores the job data 33 or 35 in a receive buffer memory 23A, reads it from the receive buffer memory and executes printing processing.

[0018] The printer 23 can request each host computer 27, 29 to send only a specified part of job data 33, 35 in place of continuously sending the whole job data 33, 35 and in addition, can make a job request at desired time. Hereby, the printer 23 can process a print job according to a suitable schedule according to the situation of its own print engine and the receive buffer memory 23A.

[0019] Figs. 3 and 4 show the operation of the printer driver of each host computer 27, 29.

[0020] As shown in Fig. 3, the printer driver of each host computer 27, 29 generates print job data which is a string of commands for instructing the printer 23 to execute a print job when the print job occurs in S21 by an instruction from a user and others and stores the print job data in a local directory of each host computer 27, 29 in S22. Next, the printer driver informs the print server 25 of the location of the print job data in S23.

[0021] When the printer driver of each host computer 27, 29 receives a job request from the printer 23 in S24 as shown in Fig. 4, it extracts a specified part of print job data specified by the job request referring to a directory and sends it to the printer 23 in S25. If the whole job data is specified in a job request, the whole is continuously sent, however, if only a part of a job is demanded in a job request, only the part is sent. When the whole print job data is sent to the printer 23 in S26, the printer driver deletes the stored print job data in S27.

[0022] As a transformed example, the processing in the step S22 shown in Fig. 3 may be also executed in a step S25 shown in Fig. 4. That is, when a print job occurs, only job location data such as an address in a network and a local job name may be also sent to the print server 25 without generating job data on the spot and afterward, when a job request is sent from the printer 23, job data may be also generated and sent to the printer 23. Print job data may be also deleted after the permission of deletion is sent from the printer 23 in place of deleting print job data in the step S27 immediately when sending the whole job data is finished.

[0023] Figs. 5 and 6 show the operation of the print server 25.

[0024] As shown in Fig. 5, when the print server 25 is informed of the location of a print job from each host computer 27, 29 in S28, it queues data in the informed job location in S29. The print server 25 monitors the state of the printer 23 as shown in Fig. 6, sequentially extracts job location data in a queue and sends it to the printer 23 in S31 when the printer 23 is in a ready state in S30.

[0025] Fig. 7 shows the operation of the printer 23.

[0026] When the printing processing of the last job is finished in S41, the printer 23 fetches the job location data of the next job from the print server 25 in S42, specifies a part to be processed (may be also the whole) of job data to be processed for the host computer 27 or 29 having an address which the job location data shows and sends a job request in S43. The printer reserves the receive buffer memory 23A of capacity required for receiving the demanded part of job data in S44 and executes processing for storing the part of the job data sent from the host computer in the receive buffer memory 23A in S45. The steps S43 to S45 are repeated until the printing of the whole pages in the print job is finished. Permission that the job data may be deleted may be also sent to the host computer when the printing of the whole pages m is finished.

[0027] According to the above embodiment, as the print server 25 has only to store only the location of job data, the required capacity of its auxiliary storage is greatly reduced. As the printer 23 can adjust the quantity of received job data according to the situation of its print engine, the capacity of the job receive buffer which can be reserved and others, required memory capacity is reduced. Some examples in case the printer 23 demands not the whole job but only a part will be described below.

[0028] For example, in a first job request, only a header of job data is demanded, after the header is analyzed, a part required for the next processing, for example only a first page is demanded and after the first page is processed, the next part, for example only data on a second page is demanded. Hereby, the required capacity of the receive buffer is greatly reduced (if sufficient memory capacity is reserved, plural pages may be also demanded in each job request).

[0029] For example, if plural copies are printed, the same job data is demanded from the host computer again and a second copy is printed after the printing of the whole pages of a first copy is finished, the above processing is repeated every copy and the host computer is permitted to delete the job data after the printing of a final copy is finished. Hereby, it is not required to store the data of the whole pages in the printer and required memory capacity is reduced.

[0030] For example, in the case of double-sided printing, printing may be executed in the order of a second page, a fourth page, a first page, a third page, --- and in such a case, the printer 23 demands only a page to be printed according to printing order as the second page

in a first job request, the fourth page in the next request, the first page in the next request, the third page in the next request, ---. Hereby, the printer 23 is not required to receive the data of a page slow in printing order earlier and store it.

[0031] For example, as one job data of the following job is very large and in addition, is linked inside (for example, according to PDF, data composing each page often exists in different locations in a file such as the data of a character font and an inserted image is linked to text data and in addition, font data linked to a first page exists in a final page in a file) if a large document such as an encyclopedia having a portable document format (PDF)(the trademark of Adobe Systems) is printed, it may be impossible that the printer 23 receives the whole job data together. In such a case, the printer 23 demands and receives a required part by required length in a file stored in the host computer such as only the text data of a first page and the data of a font and an image respectively linked to the text data are demanded from the host computer when the first page is printed. Hereby, a print image can be generated using a receive buffer of small capacity.

[0032] For example, as for a home page of world wide web (WWW) server, an image file and others are often linked to a hyper text markup language (HTML) file in which home pages are described and the linked image file exists in another uniform resource locator (URL) different from the HTML file in the same host computer. If such a home page is printed, the printer 23 demands only data in a required file from the host computer such as the printer demands its HTML file and an image file linked to a first page from each URL when the first page of the home page is printed. Hereby, a print image can be generated using a receive buffer of small capacity.

[0033] Considering a case that the printer demands not the whole job but only a part from the host computer as described above, to facilitate partial specification, the printing system may be also composed so that the host computer informs the print server or the printer about the location (for example, where in a file, in which directory in the host computer or in which URL the data of each page is located) of each part composing a job when job location data shown in the step S23 in Fig. 3 is sent to the print server (or on a suitable occasion different from the above), and the printer demands a desired part based upon the information of the above location of each part from the host computer.

[0034] As shown in the above embodiment, the host computers 27 and 29 may also generate job data immediately when a print job occurs and store it, however, if job data is not generated until a job request is sent from the printer, waste that job data is stored in a storage for a long time can be saved.

[0035] The printer 23 can be also composed so that it can control printing time itself such as it fetches a specified print job from the host computer at specified time and processes it.

[0036] As shown in Fig. 8, each role may be also fixed such as the host computer 27 informs the print server 25 of the location of a print job and the host computer 29 stores the job data 35 of the print job and supplies it to the printer 23.

[0037] As storage capacity required for storing job location data is extremely small, the printer 23 may also function as a print server as shown in Fig. 9, may also directly receive job location data 31, 33 from each host computer 27, 29 and store the data in its own auxiliary storage 23B.

[0038] Fig. 10 shows another embodiment of the present invention.

[0039] A printer 61 is provided with plural communication ports 61B and 61C and host computers 43, 45 and 53 are respectively connected to the ports 61B and 61C via communication networks 41 and 51 (the host computer may be also directly connected to the communication port via a dedicated cable). When a print job occurs in each host computer 43, 45, 53, each host computer temporarily stores the job data 71, 73, 75 of the print job in its own auxiliary storage and sends the job data to the printer 61 when a job request is sent from the printer 61. The printer 61 determines the processing schedule of the job, sends a job request to the host computer 43, 45 or 53 which stores one print job to be processed, fetches the print job data 71, 73 or 75 into a receive buffer 61A and fetches the next job data according to the similar procedure when the one print job is finished. Therefore, only one receive buffer 61A has only to be reserved. Incidentally, as a conventional type printer provided with plural ports secures plural receive buffers respectively corresponding to plural ports, the capacity of the receive buffer memory in the printer 61 shown in Fig. 10 can be reduced, compared with that in the conventional type printer.

[0040] For a method for the printer 61 to recognize the occurrence of a print job, each host computer 43, 45, 53 may also inform a print server or the printer every time a print job occurs as in the former embodiment and the printer 61 may also inquire of each host computer 43, 45, 53 as required.

[0041] The embodiments of the present invention are described above, however, these embodiments are examples for explaining the present invention and the present invention is not limited to only these embodiments. Therefore, the present invention may be also various embodiments other than the above embodiments.

Claims

1. A printing system comprising:

a host computer for generating job data of a print job; and
a printer for receiving and printing said job data from said host computer,

wherein said printer sends a job request to said host computer, and said host computer sends said job data to said printer in response to the job request sent from said printer.

2. A printing system according to claim 1, further comprising a print server, wherein said host computer sends job location data showing a location of said job data to said print server,
 - said print server temporarily stores said job location data and sends it to said printer, and said printer sends said job request to said host computer which said job location data shows.
3. A printing system according to claim 1, wherein said host computer sends job location data showing a location of said job data to said printer, and
 - said printer sends said job request to said host computer which said job location data shows.
4. A printing system according to claim 1, wherein said printer can specify a desired part of said job data when said printer sends said job request to said host computer, and
 - said host computer sends only said specified part of said job data to said printer in response to said job request.
5. A printing system according to claim 1, wherein said host computer informs said printer of a location of each part constituting said job data,
 - said printer can specify a desired part of said job data based upon said informed location of each part when said printer sends said job request to said host computer, and said host computer sends only said specified part of said job data to said printer in response to said job request.
6. A method of sending job data of a print job to a printer, comprising steps of:
 - storing the job data in a host computer;
 - sending a job request from said printer to said host computer; and
 - sending said job data from said host computer to said printer in response to said job request.
7. A method according to claim 6, further comprising steps of:
 - sending job location data showing a location of
- said job data from said host computer to a print server; and
 - temporarily storing said job location data in said print server and sending it to said printer, wherein, in said step of sending the job request, said printer sends said job request to a host computer which said job location data shows.
8. A method according to claim 6, further comprising a step of sending job location data showing a location of said job data from said host computer to said printer,
 - wherein, in said step of sending the job request, said printer sends said job request to a host computer which said job location data shows.
9. A method according to claim 6, wherein said printer can specify a desired part of said job data in said step of sending the job request, and
 - said host computer sends only said specified part of said job data to said printer in said step of sending the job data.
10. A method according to claim 6, further comprising a step of informing said printer of a location of each part of constituting said job data from said host computer,
 - wherein, in said step of sending the job request, said printer can specify a desired part of said job data, and
 - in said step of sending the job data, said host computer sends only said specified part of said job data to said printer.
11. A printer comprising:
 - a job request section for demanding job data from a host computer having said job data; and
 - a printing section for receiving and printing said job data sent from said host computer in response to a request from said job request section.
12. A printer according to claim 11, wherein said job request section receives job location data showing a location of said job data from a print server, and
 - said job request section sends a job request to said host computer which said job location data shows.
13. A printer according to claim 11, further comprising a print server for receiving job location data show-

ing a location of said job data from said host computer and temporarily storing it, wherein said job request section sends said job request to said host computer which said job location data stored in the print server shows.

5

14. A printer according to claim 11, wherein said job request section can specify a desired part of said job data for said host computer when said job request section sends said job request, and

10

said printing section receives only said desired part of said job data sent from said host computer in response to a request from said job request section and prints it.

15

15. A printer according to claim 11, further comprising means which a location of each part constituting said job data is informed from said host computer, wherein said job request section can specify a desired part of said job data for said host computer based upon said informed location of each part when said job request section sends said job request, and

20

25

said printing section receives only said desired part of said job data sent from said host computer in response to a request from said job request section and prints it.

30

16. A method of operating a printer, comprising steps of:

demanding job data from a host computer having said job data; and receiving and printing said job data sent from said host computer in response to a job request of said demanding step.

35

17. A method according to claim 16, further comprising a step of receiving job location data showing a location of said job data from a print server, wherein in said step of demanding, said job request is sent to said host computer which said job location data shows.

40

45

18. A method according to claim 16, further comprising a step of receiving job location data showing a location of said job data from said host computer and temporarily storing it, wherein, in said step of demanding, said job request is sent to said host computer which said stored job location data shows.

50

19. A method according to claim 16, wherein, in said step of demanding, a desired part of said job data can be specified for said host com-

55

puter, and

in said step of printing; only said desired part of said job data sent from said host computer in response to said job request is received and printed.

20. A method according to claim 16, further comprising a step of being informed of a location of each part constituting said job data from said host computer, wherein, in said step of demanding, a desired part of said job data can be specified for said host computer based upon said informed location of each part, and

in said step of printing, only said desired part of said job data sent from said host computer in response to said job request is received and printed.

21. A print server comprising:

a receiver for receiving job location data showing a location of job data from a host computer; a storage for temporarily storing said received job location data; and a transmitter for sending said stored job location data to a printer.

22. A method of operating a print server, comprising steps of:

receiving job location data showing a location of job data from a host computer; temporarily storing said received job location data; and sending said stored job location data to a printer.

23. A record medium readable by a computer on which a program for instructing a computer to execute the following steps is recorded, said steps comprising:

a step of receiving job location data showing a location of job data from a host computer; a step of temporarily storing said received job location data; and a step of sending said stored job location data to a printer.

24. A host computer of a printer comprising:

a storage for storing job data of a print job; and a transmitter for sending said stored job data to a printer in response to a job request from said printer.

25. A host computer according to claim 24, further

comprising a location information section for sending job location data showing a location of said job data to one of said printer and a print server.

26. A host computer according to claim 24, wherein, if a part of said job data is specified in said job request from said printer, said transmitter sends only said specified part of said job data to said printer.
27. A host computer according to claim 24, further comprising means for informing one of said printer and a print server of a location of each part constituting said job data, wherein, if a part of said job data is specified based upon said informed location in said job request from said printer, said transmitter sends only said specified part of said job data to said printer.
28. A method of operating a host computer of a printer, comprising steps of:
- storing job data of a print job; and
 - sending said stored job data to a printer in response to a job request from said printer.
29. A method according to claim 28, further comprising a step of sending job location data showing a location of said job data to one of said printer and a print server.
30. A record medium readable by a computer on which a program for instructing a computer to execute the following steps is recorded, said steps comprising:
- a step of storing job data of a print job; and
 - a step of sending said stored job data to a printer in response to a job request from said printer.
31. A record medium according to claim 30, wherein a program for instructing a computer to further execute a step of sending job location data showing a location of said job data to one of said printer and a print server is recorded.
32. A record medium according to claim 30, wherein, if a part of said job data is specified in said job request from said printer, only said specified part of said job data is sent to said printer in said step of sending job data.

5

10

15

20

25

30

35

40

45

50

55

7

FIG. 1

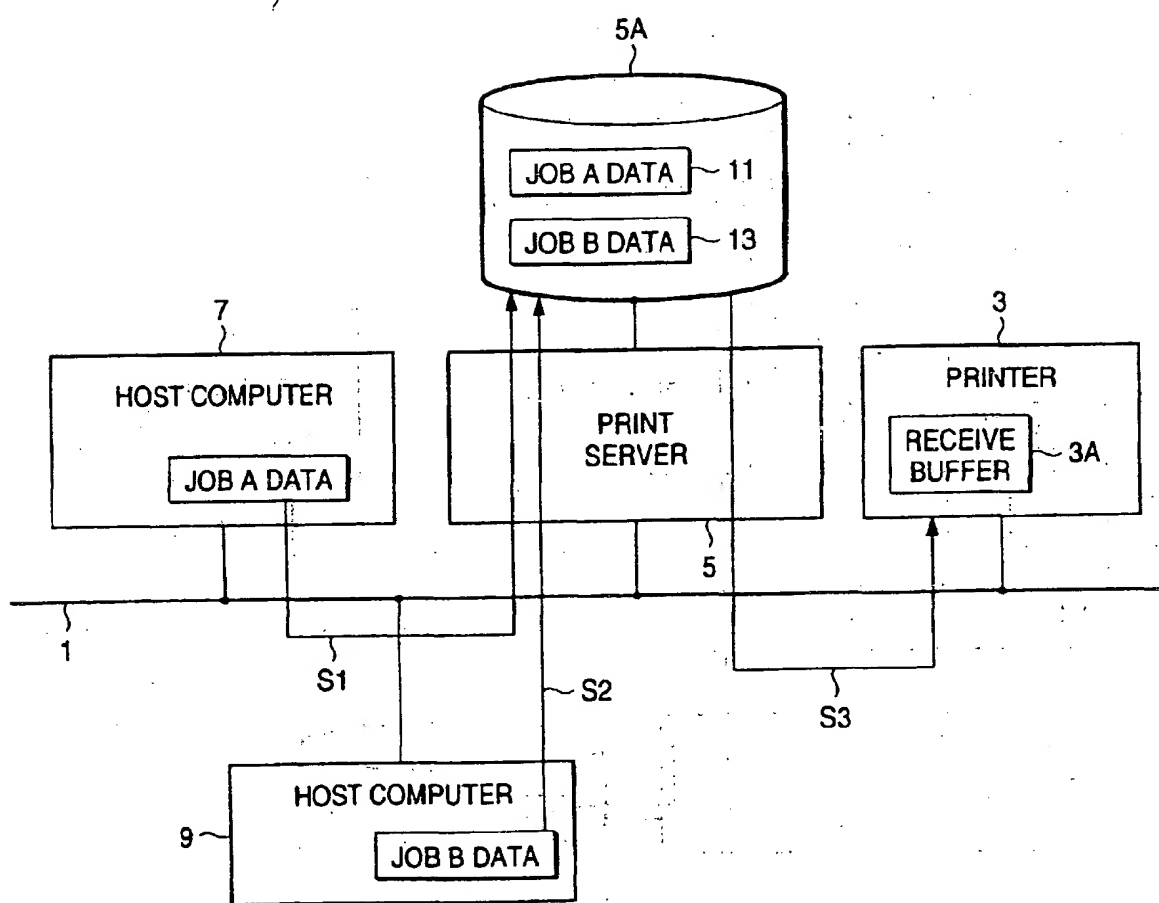


FIG. 2

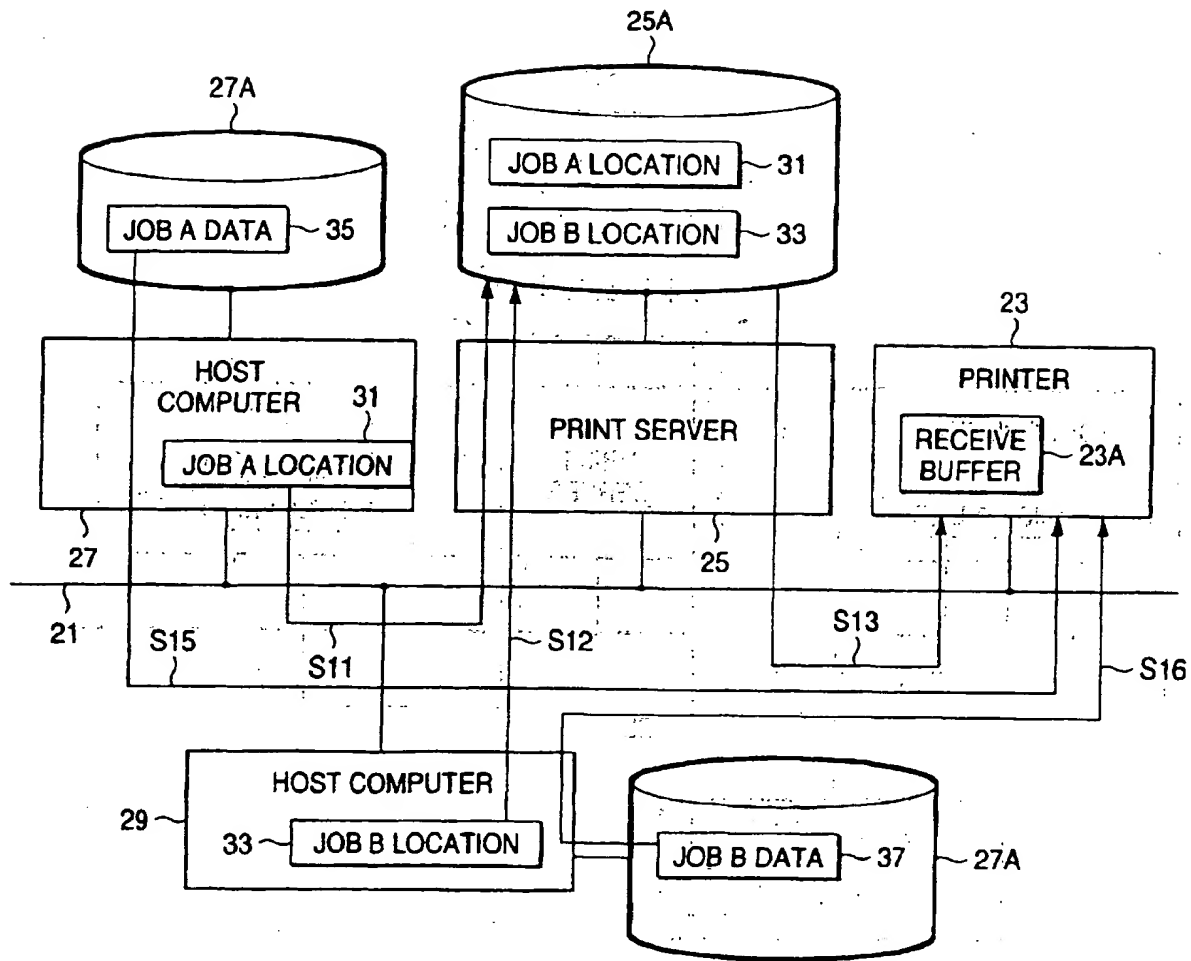


FIG. 3

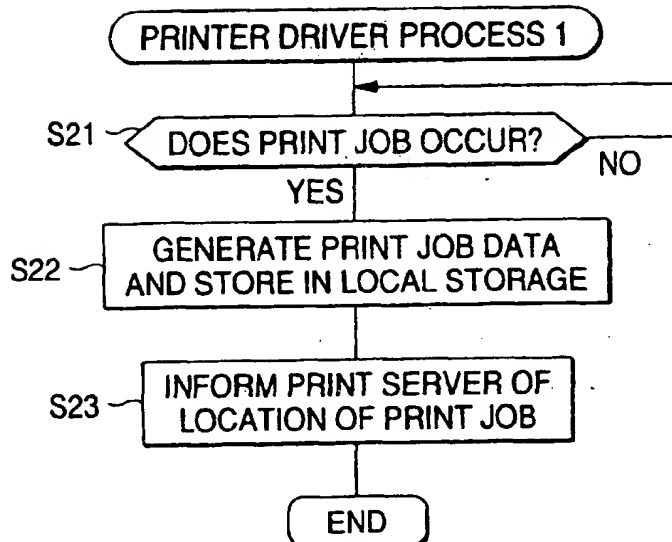


FIG. 4

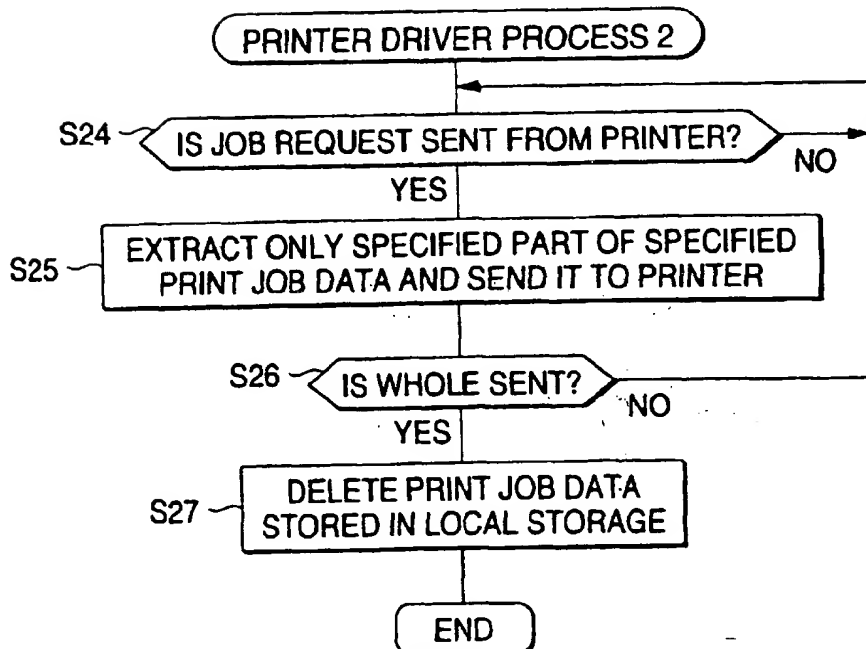


FIG. 5

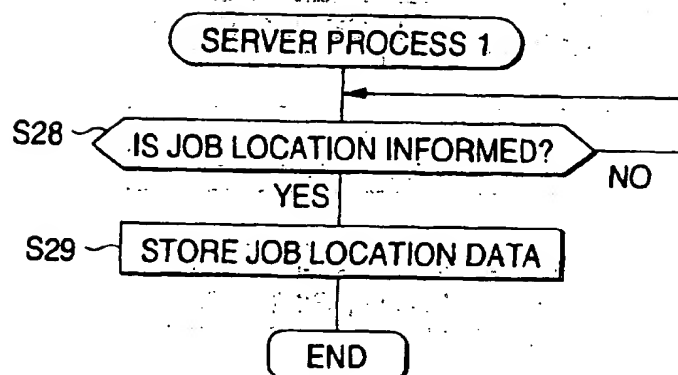


FIG. 6

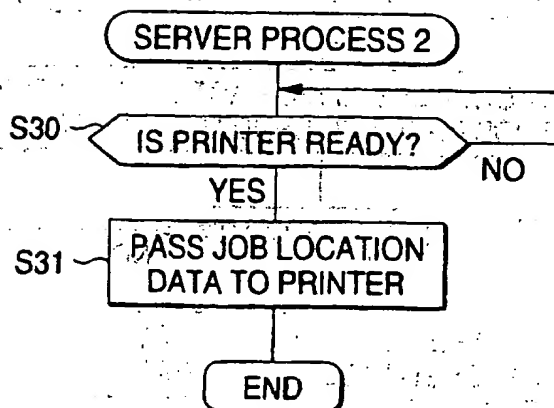


FIG. 7

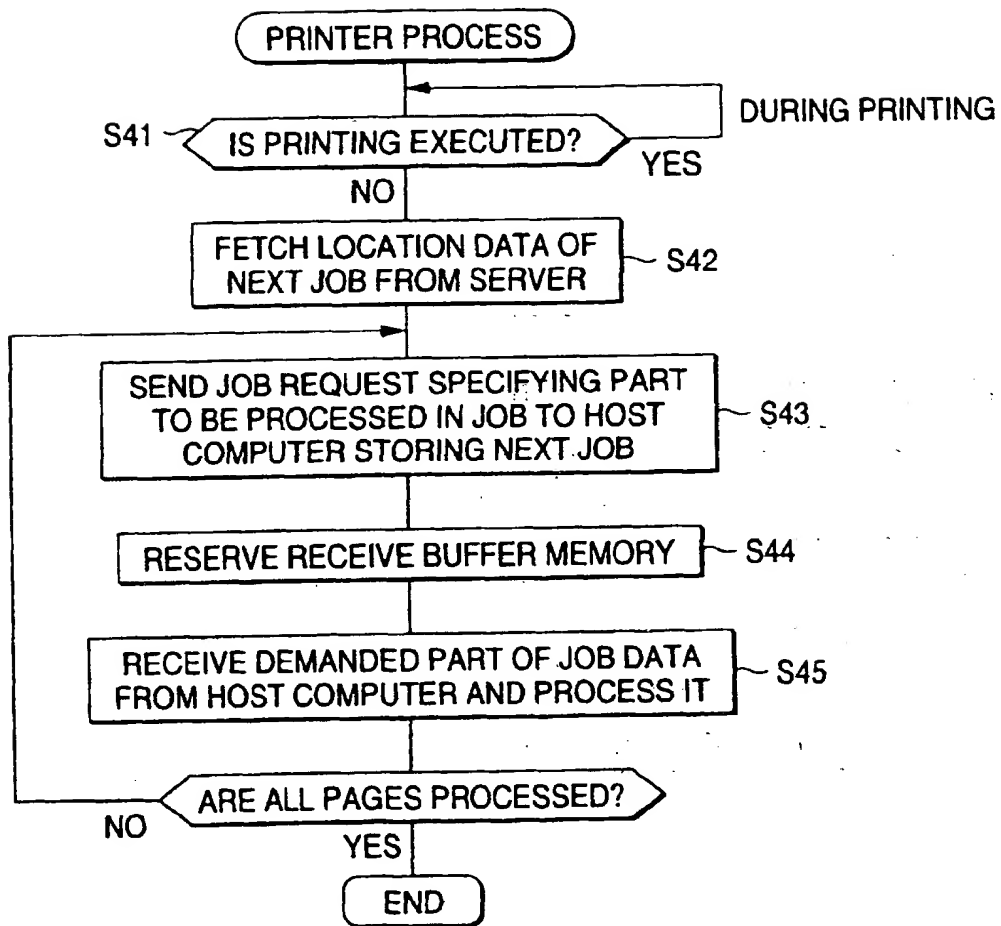


FIG. 8

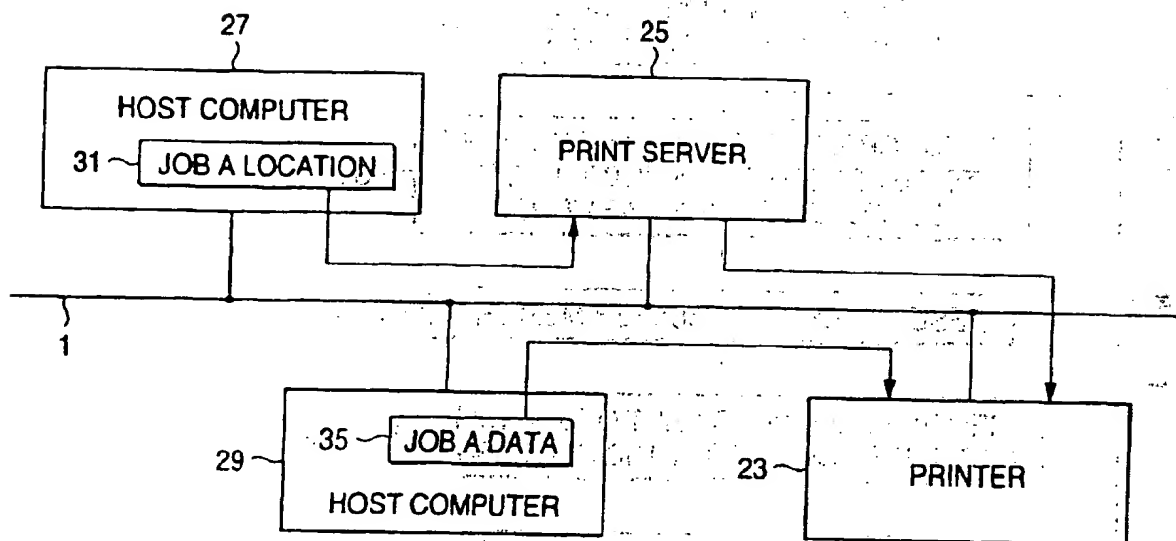


FIG. 9


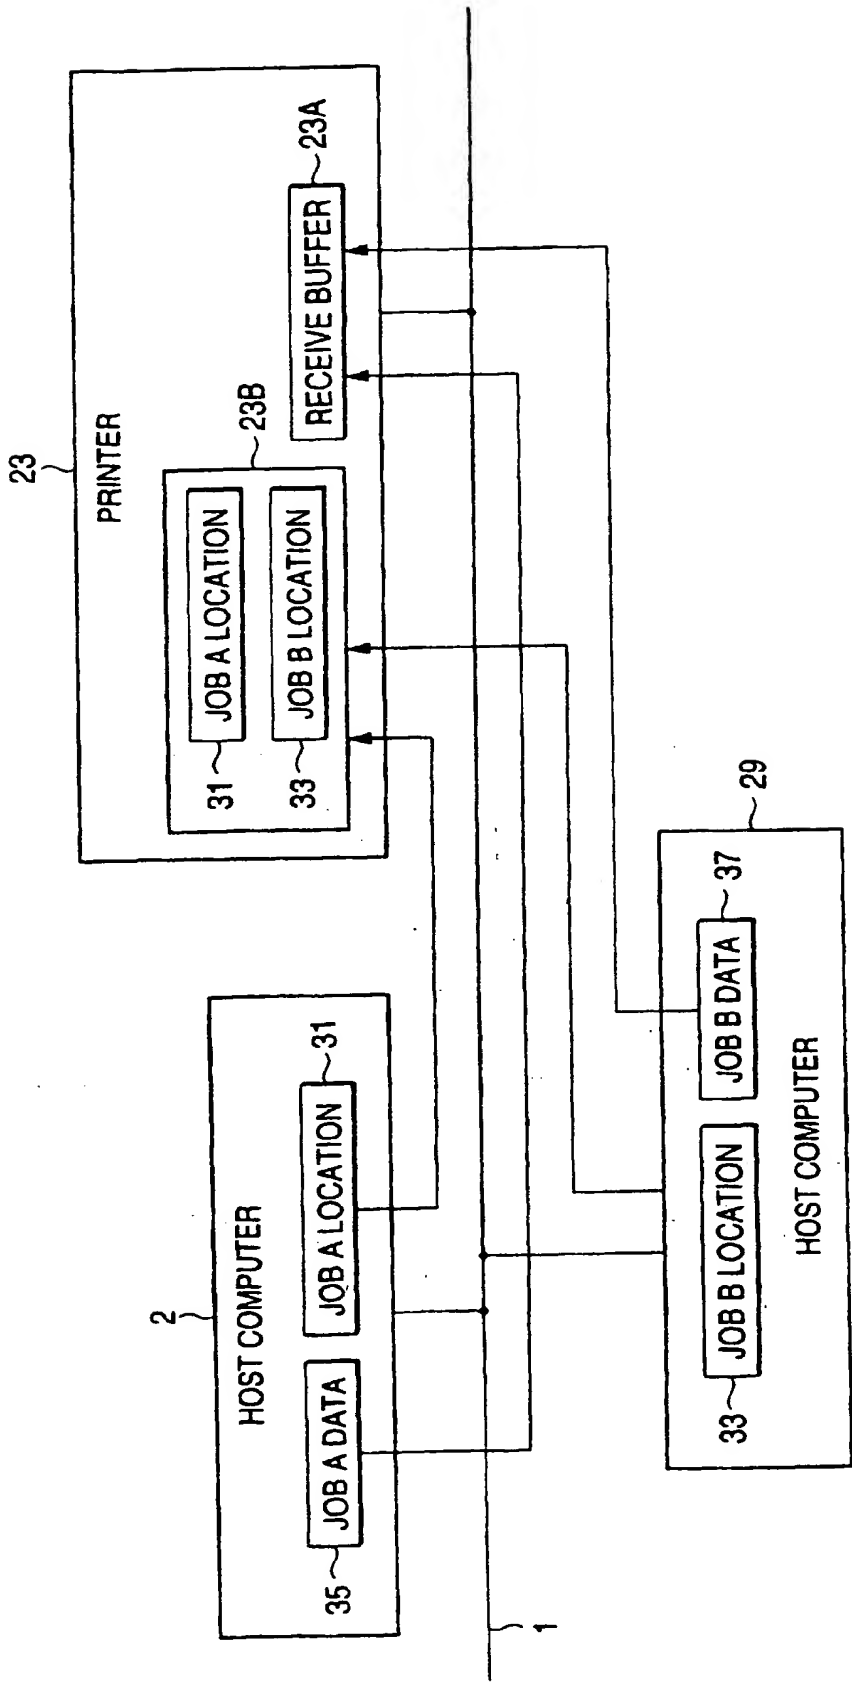


FIG. 10

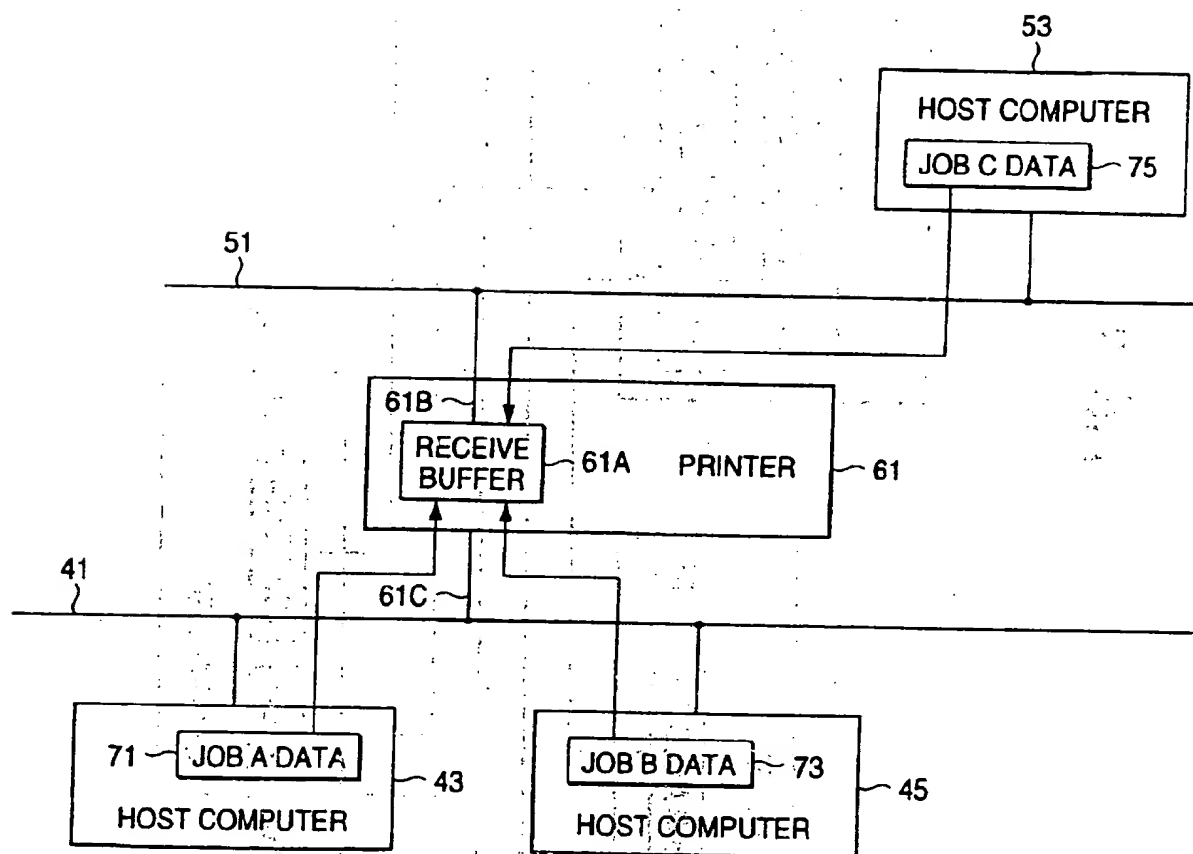

273. 11.11.11

274. 11.11.11

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 974 892 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
30.01.2002 Bulletin 2002/05

(51) Int Cl.7: G06F 3/12

(43) Date of publication A2:
26.01.2000 Bulletin 2000/04

(21) Application number: 99305793.4

(22) Date of filing: 21.07.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: SEIKO EPSON CORPORATION
Shinjuku-ku, Tokyo 163-0811 (JP)

(72) Inventor: Shima, Toshihiro
Suwa-shi, Nagano 392-8502 (JP)

(74) Representative: Sturt, Clifford Mark et al
Miller Sturt Kenyon 9 John Street
London WC1N 2ES (GB)


(30) Priority: 22.07.1998 JP 20614498

(54) Printing system, printer and print server

(57) When a print job occurs, each host computer stores its job data on its own disk and sends job location data showing the location of the job data to a print server. The print server temporarily stores the job location data

and sends it to a printer when the printer is ready. When the printer receives the job location data, it fetches job data from the host computer which the job location data shows and prints the job data.

FIG. 2

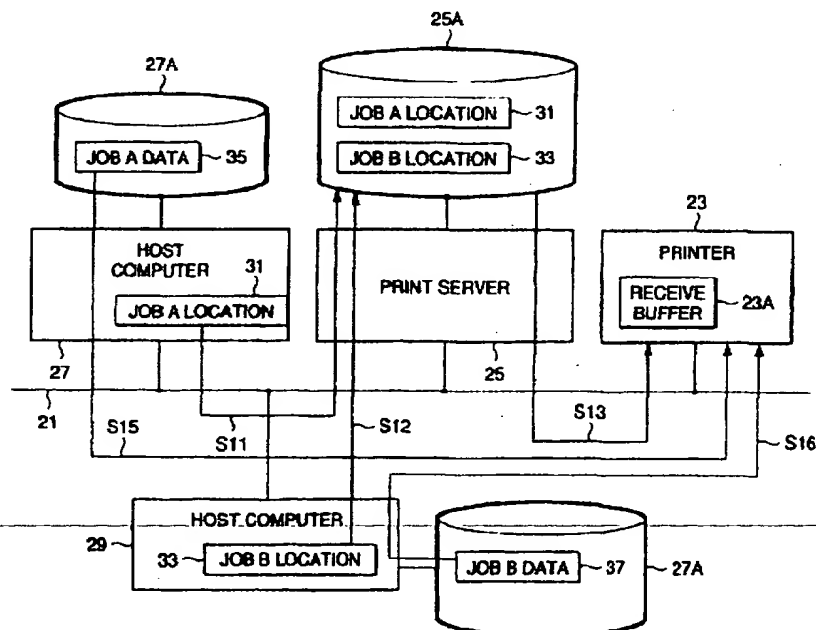

EP 0 974 892 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 5793

DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim
A	EP 0 847 002 A (HEWLETT PACKARD CO) 10 June 1998 (1998-06-10) * the whole document *	1-3, 6-8, 11-13, 16-18, 21-25, 28-31
A	EP 0 598 513 A (CANON INFORMATION SYST INC) 25 May 1994 (1994-05-25) * page 5, line 32 - line 40 *	1, 2, 6, 8, 11-13, 15-18, 21-25, 28-32
		CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
		G06F3/12
		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
		G06F G06K
The present search report has been drawn up for all claims		
Place of search	Date of completion of the search	Examiner
THE HAGUE	12 December 2001	Weiss, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>		

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 5793

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-12-2001

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0847002	A	10-06-1998	US	5867633 A	02-02-1999
			EP	0847002 A1	10-06-1998
			JP	10248014 A	14-09-1998
EP 0598513	A	25-05-1994	US	5611046 A	11-03-1997
			DE	69329818 D1	08-02-2001
			DE	69329818 T2	31-05-2001
			EP	0598513 A1	25-05-1994
			JP	6214916 A	05-08-1994

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE LEFT BLANK